



# Recommended Wheel Standards for FLMR

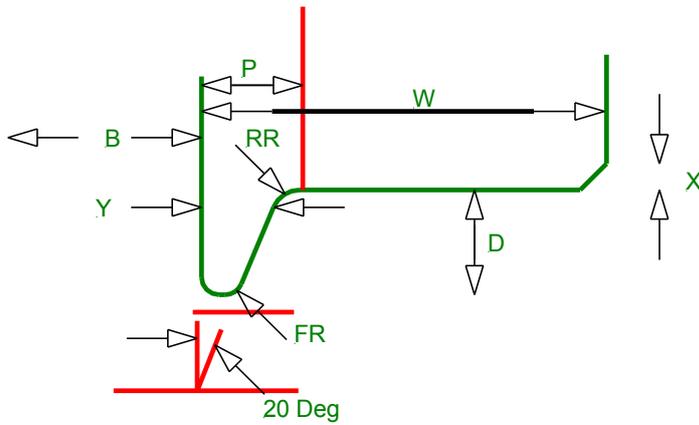

Gauge	2 1/2 inch	3 1/2 inch	5 inch	7 1/4 inch
<b>B</b> Back to back	2.281	3.281	4.687	6.8
<b>D</b> Flange depth	0.085	0.110	0.140	0.203
<b>P</b> Diameter point	0.090	0.126	0.176	0.254
<b>W</b> Wheel width (min)	0.268	0.375	0.535	0.776
<b>Y</b> Flange base	0.55	0.76	0.106	0.154
<b>RR</b> Root radius	0.020	0.050	0.070	0.10
<b>FR</b> Flange radius	0.015	0.030	0.045	0.065
<b>X</b> Tread chamfer	0.015	0.020	0.030	0.040

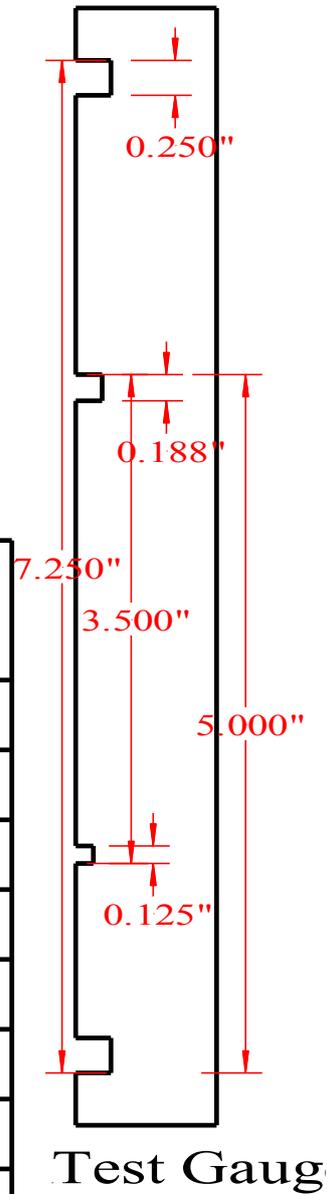

Wheel width and flange depth may be increased by 25% for riding cars or narrow gauge practice.